HENO ISOFOIL
Bubble Foil



Our insulation range consists of the product Heno Isofoil bubble wrap. Heno Isofoil can be used directly as a professional insulation material and / or as a protection product against external influences.

Areas of application


- Insulating horticultural greenhouses, floors, roofs and sheds / garages.
- (Temporary) sealing of construction projects in the cold winter months.

UV resistant

3 layers

R-value

R 0,147
M²K/W

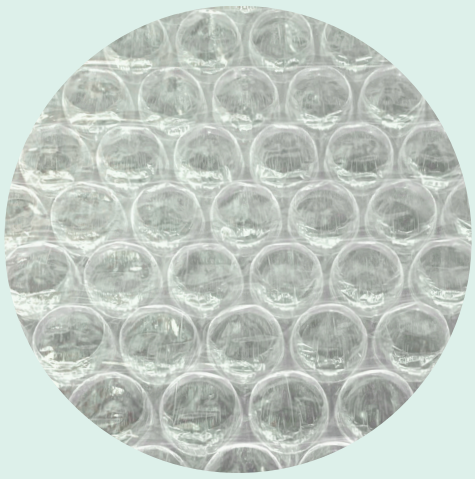

Composition

Heno Isofoil is made up of three layers of high-quality PE bubble foil, all sides are sealed so you are assured of a high-quality and airtight material.

Its high insulation value provides a significant improvement in comfort and energy savings.

HENO ISOFOIL
Bubble Foil



Advantages of Heno Isofoil

- Heat and cold resistance
- Highly transparent and UV resistant
- Easy to process
- Energy savings of up to 40% can be achieved



Properties Heno Isofoil

Number of layers:	3
R-value:	0.147 m²K/W
Folding method:	plano or folded
Foil thickness:	115 µm
Bubble diameter:	31.7 mm
Bubble height:	13.7 mm
Bubble height tolerance +-%:	10%

We would like to point out that the Heno Isofoil bubble foil remains 12 months UV-resistant in a central European climate.

Standard dimensions:

1,20 x 50 Meter (plano)
1,50 x 50 Meter (plano)
2,00 x 50 Meter (plano)
2,40 x 50 Meter (plano)