



HENO ISOFOIL


Bubble Foil

Our insulation range consists of the product Heno Isofoil bubble wrap. Heno Isofoil can be used directly as a professional insulation material and / or as a protection product against external influences.



Areas of application


- Insulating horticultural greenhouses, floors, roofs and sheds / garages.
- (Temporary) sealing of construction projects in the cold winter months.




UV resistant



3 layers



R-value

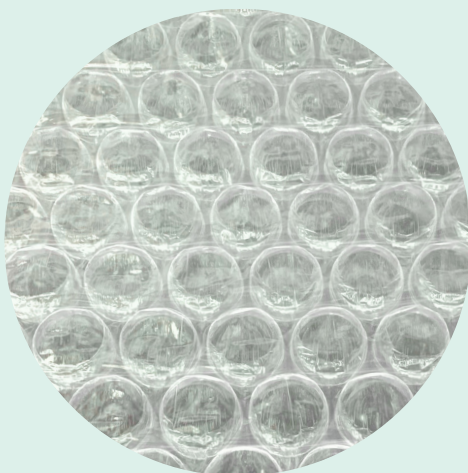

Composition

Heno Isofoil is made up of three layers of high-quality PE bubble foil, all sides are sealed so you are assured of a high-quality and airtight material.

Its high insulation value provides a significant improvement in comfort and energy savings.



HENO ISOFOIL

Bubble Foil

Advantages of Heno Isofoil

- Heat and cold resistance
- Highly transparent and UV resistant
- Easy to process
- Energy savings of up to 40% can be achieved



Properties Heno Isofoil

Number of layers:	3
R-value:	0.147 m ² K/W
Folding method:	plano or folded
Foil thickness:	115 µm
Bubble diameter:	31.7 mm
Bubble height:	13.7 mm
Bubble height tolerance +/- %:	10%

We would like to point out that the Heno Isofoil bubble foil remains 12 months UV-resistant in a central European climate.

Standard dimensions:

1,20 x 50 Meter (plano)
1,50 x 50 Meter (plano)
2,00 x 50 Meter (plano)
2,40 x 50 Meter (plano)

Special dimensions (sealed):

3,00 x 50 Meter (folded)
3,50 x 50 Meter (folded)
4,00 x 50 Meter (folded)
4,80 x 50 Meter (folded)